

# NOISE INDICATOR NI-100


The Noise Indicator NI-100 alerts users to potentially dangerous noise levels, helping identify areas where further noise assessment or hearing protection may be needed. Users clip the device to a shirt or jacket and its LED light delivers a clear indicator when noise levels exceed a potentially hazardous threshold. Its small size and lightweight design make it ideal for workers in a variety of industries.



#### **Features and Benefits**

- + Provides visual "Go/No Go" indication of noise levels below or above 85 dBA
- + Flashing green indicates noise level is below 85 dBA and flashing red indicates noise level is above 85 dBA and hearing protection may be needed
- + Simple one-button operation with a rechargeable battery
- + Small and lightweight
- + Clips to lapel or shirt pocket
- + Provides an affordable training tool for helping workers know when hearing protection may be required
- + Increase awareness of hearing conservation guidelines
- + Can be used as a mapping tool to qualify future noise studies



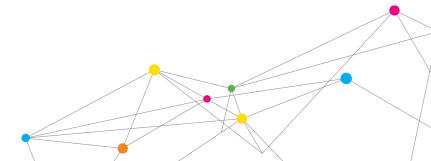

## **SPECIFICATIONS**

# **NOISE INDICATOR NI-100**

Size  $2''(L) \times 1.4''(W) \times 0.5''(D) / 5.1 \text{ cm } (L) \times 1.4''(W) \times 0.5''(D) / 5.1 \text{ cm } (L) \times 1.4''(W) \times 0.5''(D) / 5.1 \text{ cm } (L) \times 1.4''(W) \times 0.5''(D) / 5.1 \text{ cm } (L) \times 1.4''(W) \times 0.5''(D) / 5.1 \text{ cm } (L) \times 1.4''(W) \times 0.5''(D) / 5.1 \text{ cm } (L) \times 1.4''(W) \times 0.5''(D) / 5.1 \text{ cm } (L) \times 1.4''(W) \times 0.5''(D) / 5.1 \text{ cm } (L) \times 1.4''(W) \times 0.5''(D) / 5.1 \text{ cm } (L) \times 1.4''(W) \times 0.5''(D) / 5.1 \text{ cm } (L) \times 1.4''(W) \times 0.5''(D) / 5.1 \text{ cm } (L) \times 1.4''(W) \times 0.5''(D) / 5.1 \text{ cm } (L) \times 1.4''(W) \times 0.5''(D) / 5.1 \text{ cm } (L) \times 1.4''(W) \times 0.5''(D) / 5.1 \text{ cm } (L) \times 1.4''(W) \times 0.5''(D) / 5.1 \text{ cm } (L) \times 1.4''(W) \times 0.5''(D) / 5.1 \text{ cm } (L) \times 1.4''(W) \times 0.5''(D) / 5.1 \text{ cm } (L) \times 1.4''(W) \times 0.5''(D) / 5.1 \text{ cm } (L) \times 1.4''(W) \times 0.5''(W) / 5.1 \text{ cm } (L) \times 1.4''(W) \times 0.5''(W) / 5.1 \text{ cm } (L) \times 1.4''(W) \times 0.5''(W) / 5.1 \text{ cm } (L) \times 1.4''(W) \times 0.5''(W) / 5.1 \text{ cm } (L) \times 1.4''(W) \times 0.5''(W) / 5.1 \text{ cm } (L) \times 1.4''(W) \times 0.5''(W) / 5.1 \text{ cm } (L) \times 1.4''(W) \times 0.5''(W) / 5.1 \text{ cm } (L) \times 1.4''(W) \times 0.5''(W) / 5.1 \text{ cm } (L) \times 1.4''(W) \times 0.5''(W) / 5.1 \text{ cm } (L) \times 1.4''(W) \times 0.5''(W) / 5.1 \text{ cm } (L) \times 1.4''(W) \times 0.5''(W) / 5.1 \text{ cm } (L) \times 1.4''(W) \times 0.5''(W) / 5.1 \text{ cm } (L) \times 1.4''(W) \times 0.5''(W) / 5.1 \text{ cm } (L) \times 1.4''(W) \times 0.5''(W) / 5.1 \text{ cm } (L) \times 1.4''(W) \times 0.5''(W) / 5.1 \text{ cm } (L) \times 1.4''(W) \times 1.4''(W) / 5.1 \text{ cm } (L) \times 1.4$ 

3.6 cm (W) x 1.3 cm (D)

Weight 0.6 oz (17 g)

Temperature

Operating/Storage -14 to 122°F / -10 to 50°C Humidity Range 0 to 95%; non-condensing

Accuracy 3 dI

Alert Level Flashes red when >85 dBA

Flashes green when <85 dBA

Battery Li-Poly (flat cell)\* with approximately 200 hours of operating before recharging

Battery Life Approximately two years of

charging cycles

Charging A mini-USB cable (sold separately) plugs

into bottom port of device

Auto-Power Off The device will power off after

approximately 10 hours

\*Not certified intrinsically safe

Specifications are subject to change without notice.

Quest is a trademark, and TSI and the TSI logo are registered trademarks of TSI Incorporated.



### **One-button operation**

- + Simply clip to lapel and power-on
- + Easy for workers to use and understand

#### **Small Size**

+ Compact, lightweight design for increased hearing protection compliance

#### Visual "Go/No Go"

- + Green LED ("Go") flashes when noise level is below 85 dBA
- + Red LED ("No Go") flashes when noise level exceeds 85 dBA
- + Easy-to-understand visual indication when hearing protection may/may not be needed

# Rechargeable battery

- + Provides up to 200 hours of use between charges
- + 10-hour auto-power off helps prolong battery life for extra cost savings



 $\textbf{TSI Incorporated} \cdot \textbf{Visit our website } \textbf{www.tsi.com} \ \text{for more information}.$ 

USA Tel: +1 800 874 2811
UK Tel: +44 149 4 459200
France Tel: +33 1 41 19 21 99
Germany Tel: +49 241 523030

 India
 Tel: +91 80 67877200

 China
 Tel: +86 10 8219 7688

 Singapore
 Tel: +65 6595 6388

Printed in U.S.A.

